



DC Inverter  
Reversible

A<sup>++</sup>

Airwell



# CDMX

## Cassette 360°



RC18  
included



CDMX 025N-050N




CDMX 070N-140N

### + PRODUCT

- RC18 remote control included
- Compact design
- 360° airflow
- Compatible with YDZC and ZDAA multisplits

### FEATURES


#### TECHNOLOGY




#### AIR QUALITY



#### USER FUNCTIONS

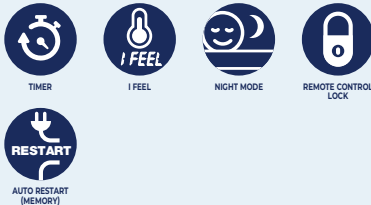

#### INSTALLER FUNCTIONS

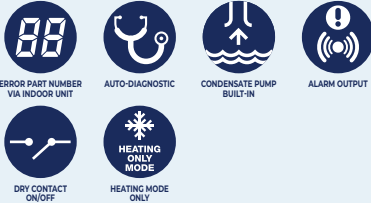

### CERTIFICATION

- AIRWELL participates in the ECP programme for ACI. Check ongoing validity of certificate:

[www.eurovent-certification.com](http://www.eurovent-certification.com)



### + «SUSTAINABLE DEVELOPMENT»

- > Energy label A<sup>++</sup> in cooling mode and A<sup>+</sup> in heating mode, guaranteeing energy savings.

### + «USER»

- > Design with a front panel that fits perfectly into false ceiling.
- > 360° air distribution in the room for a uniform temperature.

### + «INSTALLER»


- > Compact size ideal for low ceiling installations.
- > Parameter display on the indoor unit for quick reading.
- > Unit with pre-drilled holes for fresh air supply or blowing into a small room.
- > Maximum piping length up to 75m adapted to complex and remote installation.

### + «TECHNOLOGY»

- > On/off contact included associated with a "room card" or other solution (not supplied) for better control and for energy savings.
- > Alarm contact (synthesis fault) included.
- > Room sensor built into the remote control for better comfort (mode "I Feel").
- > Condensate pump included for automatic discharge.
- > Electronic expansion valve for better operating precision.
- > Golden Fin treatment on the heat exchangers (external and internal) for protection against corrosion and durability over time.
- > Wide operating range of -15° to 50°C in cooling mode and -15° to 24°C in heating mode.



AirHome connectivity

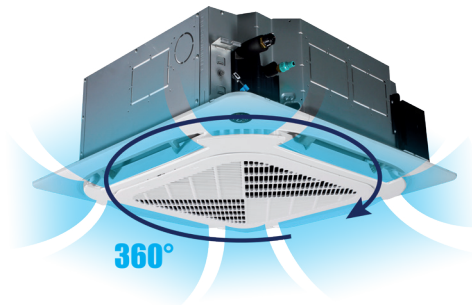

360° airflow,  
WITH ROUND CORNERS

### OPTIONS

ACCESSORY	PART NUMBER	PICTURE	FUNCTION
Wired remote control RCW11	7ACEL1774		• Weekly timer, mode, fan speed, On/Off timer, "I Feel" function, temperature.
LCAC Wi-Fi accessory	7ACEL1883		• Accessory for remote control via Wi-Fi. (compatible with CDMX-035N-050N).
	7ACEL1900		• Accessory for remote control via Wi-Fi. (compatible with CDMX-070N-100N-140N).

# TECHNICAL DATA

MULTISPLIT  
CONFIGURATION  
ONLY

INDOOR UNIT		CDMX-025N-09M25	CDMX-035N-09M25	CDMX-050N-09M25	CDMX-070N-09M25	CDMX-100N-09M25	CDMX-100N-09M25	CDMX-140N-09M25*
Part number		7SP042290	7SP042291	7SP042292	7SP042293	7SP042294	7SP042294	7SP042295
Phase		Single-phase	Single-phase	Single-phase	Single-phase	Single-phase	Three-phase	Three-phase
COOLING								
Rated power (min./max.)	kW	2.60 (0.8~3.3)	3.52 (0.85~4.11)	5.28 (2.90~5.59)	7.03 (3.30~7.91)	10.55 (2.70~11.43)	10.55 (2.70~11.43)	14.07 (3.52~15.83)
Pdesignnc	kW		3.50	5.30	7.00	10.50	10.50	14.00
Rated power input	kW		1.01	1.63	2.32	3.95	4.00	4.65
SEER/Energy label			6.6/A++	6.3/A++	6.2/A++	6.7/A++	6.3/A++	6.1/A++
Operating limits	°C	-15°~50°C Dry bulb						

HEATING		2.90 (0.85~3.7)	3.81 (0.47~4.31)	5.57 (2.37~6.10)	7.62 (2.81~8.94)	11.14 (2.78~12.30)	11.14 (2.78~12.66)	16.12 (4.10~17.29)
Rated power (min./max.)	kW							
Pdesignh (average climate)	kW		2.70	4.20	6.00	8.50	8.00	11.00
Pdesignh (warmer climate)	kW		3.30	5.40	6.30	10.10	10.10	12.00
Rated power input	kW		1.02	1.54	1.90	3.00	3.00	4.58
SCOP/Energy label (average climate)			4.1/A+	4.0/A+	4.0/A+	4.0/A+	3.9/A	4.0/A+
SCOP/Energy label (warmer climate)			5.1/A+++	4.8/A++	5.1/A+++	5.1/A+++	5.1/A+++	5.0/A++
Operating limits	°C	-15°~24°C Dry bulb						
Power at -7°C	kW		2.95	4.10	5.97	9.13	8.91	12.50
Power at -10°C	kW		2.68	3.66	5.80	7.84	7.60	9.67
Power at -15°C	kW		2.14	2.93	4.64	6.27	6.29	7.74

INDOOR UNIT		31/34/39	34/37/42	39/44/45	42/47/50	46/48/51	46/48/51	48/50/52
Sound pressure level at 1 m (LS/MS/HS)	dB(A)							
Sound level	dB(A)	54	57	59	59	64	64	66
Airflow (LS/MS/HS)	m³/h	400/504/580	389/485/569	479/584/680	992/1118/1247	1300/1530/1700	1300/1530/1700	1600/1750/1900
Dehumidification	l/h	1.20	1.50	2.00	3.00	3.80	3.80	5.50
Unit dimensions (WxHxD)	mm	570x260x570	570x260x570	570x260x570	830x205x830	830x245x830	830x245x830	830x287x830
Package dimensions (WxHxD)	mm	662x317x662	662x317x662	662x317x662	910x250x910	910x290x910	910x290x910	910x330x910
Net weight/Gross weight	kg	14.5/18.8	16.3/20.4	16/22.1	21.6/25.4	27.2/31.2	27.2/31.2	29.3/33.5
PANEL								
Unit dimensions (WxHxD)	mm	647x50x647	647x50x647	647x50x647	950x55x950	950x55x950	950x55x950	950x55x950
Package dimensions (WxHxD)	mm	715x123x715	715x123x715	715x123x715	1035x90x1035	1035x90x1035	1035x90x1035	1035x90x1035
Net weight/Gross weight	kg	2.5/4.5	2.5/4.5	2.5/4.5	6/9	6/9	6/9	6/9
Panel part number		7ACVF0566	7ACVF0566	7ACVF0566	7ACVF0600	7ACVF0600	7ACVF0600	7ACVF0600

OUTDOOR UNIT		-	YDAX-035H-09M25	YDAX-050H-09M25	YDAX-070H-09M25	YDAX-100H-09M25	YDAX-100H-09T35	YDAX-140H-09T35
Part number		-	7SP063170	7SP063171	7SP063172	7SP063173	7SP063174	7SP063175
Sound pressure level at 1 m	dB(A)		51	54	58	59	59	63
Sound level	dB(A)		62	65	69	70	70	74
Airflow	m³/h		2200	2100	3500	4000	4000	7500
Compressor type			Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Unit dimensions (WxHxD)	mm		765x555x303	805x554x330	890x673x342	946x810x410	946x810x410	952x1333x415
Package dimensions (WxHxD)	mm		887x610x337	915x615x370	995x740x398	1090x885x500	1090x885x500	1095x1480x495
Net weight/Gross weight	kg		26.6/29	32.5/35.3	43.9/46.7	66.9/72.1	75.5/85.6	103.7/118.3

POWER SUPPLY		1P/220-240V/50Hz	1P/220-240V/50Hz	1P/220-240V/50Hz	1P/220-240V/50Hz	1P/220-240V/50Hz	3P/380-415V/50Hz	3P/380-415V/50Hz
Phase/Voltage/Frequency								
Power supply side			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Power cable section	mm²		3x1.5	3x1.5	3x2.5	3x4.0	5x2.5	5x2.5
Max. current (D curve)	A		10	16	20	25	16	16
Shielded electrical connections	mm²	4x1.0	4x1.5	4x1.0	4x1.5	4x1.5	4x1.5	4x1.5

PIPE LINE		3/8"	3/8"	1/2"	5/8"	5/8"	5/8"	5/8"
Suction pipe diameter	inches							
Liquid pipe diameter	inches	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"
Max. length	m		25	30	50	75	75	75
Max. height	m		10	20	25	30	30	30
Refrigerant/GWP			R32/675	R32/675	R32/675	R32/675	R32/675	R32/675
Charge (5 m)	kg		0.72	1.15	1.50	2.40	2.40	2.90
Additional charge	g/m		12	12	24	24	24	24

## MATCHING

INDOOR UNIT	COMPATIBLE WITH OUTDOOR UNIT	
	MONOSPLIT	MULTISPLIT
<b>CASSETTE</b>		
 CDMX 025N		 ZDAA  YDZC
 CDMX 035N & 050N	 YDAX	 ZDAA  YDZC

## MATCHING

INDOOR UNIT	COMPATIBLE WITH OUTDOOR UNIT	
	CASSETTE	MONOSPLIT
 CDMX 070N-100N		 YDAX
 CDMX 140N		 YDAX

GRUPE AIRWELL

10, RUE DU FORT DE SAINT CYR - 78180 MONTIGNY LE BRETONNEUX, FRANCE

TEL.: +33 (0)1 76 21 82 00 - www.airwell.com

22-AW-PRODUCT LEAFLET-CDMX-EN-0322 - GROUPE AIRWELL SA - Specifications subject to change without notice. Pictures non contractual. Printed in U.E.

CDMX