




DC Inverter
Cooling & heating

HDH HIGH WALL

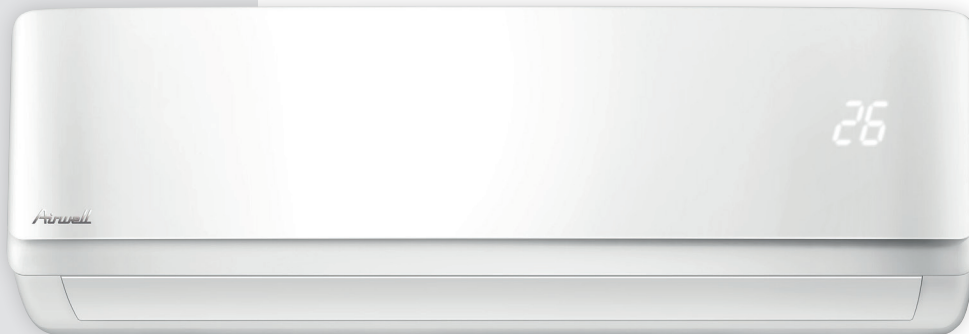

+ PRODUCTS

- RC08C remote control included
- Ioniser + high efficiency filtration
- 4D airflow
- High performance
- Clean design
- Weekly programming (optional)
- Dry contact (optional)
- Compatible with the Multisplit YDZC range

FEATURES

TECHNOLOGY:



AIR QUALITY/CLEAN:



USER FUNCTIONS:



INSTALLER FUNCTIONS:



THE + «SUSTAINABLE DEVELOPMENT»

- High performance product (SEER/SCOP)
- Energy savings with heating mode only and setpoint limits

THE + «USER»


- Built-in WiFi
- Optimal air diffusion
- Quiet (20 dB)
- Multiple applications connectable using the dry contact: room card, presence detection

THE + «INSTALLER»

- Installer mode on remote control

THE + «TECHNOLOGY»

- High corrosion resistance with the Golden Fin
- Coolant leak detection
- High performance at -15 °C

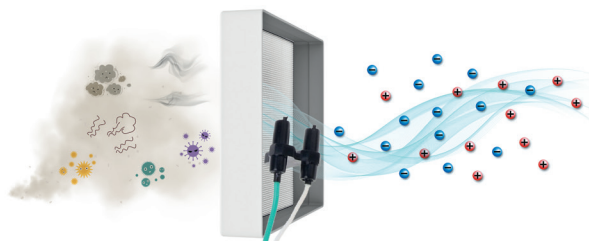

ULTRA-PUR AIR THANKS TO:

- Cold catalyst and high density filters: **anti small dust particles.**
- Active carbon filter: **deodorizer.**
- Ionizer and silver ion filter: **antibacterial.**

OPTIONS

Accessory	Part number	Photo	Function
Wired single control RCW22	7ACEL1778		Weekly timer, mode, fan speed, timer On/Off, "I Feel" function, temperature.
Dry contact On/Off	7ACEL1788		External control of air conditioner.
Test tool for high wall	7ACEL1710		Easy viewing of system parameters, failure records and parameter adjustments.
Water pump FlowwatchDesign	7ACTL0518		Evacuate condensates from indoor units.

CERTIFICATION

AIRWELL participates in the ECP programme for AC1.
Check ongoing validity of certificate:
www.eurovent-certification.com



- Certified in Monosplit configuration

Airwell
Just feel well

HDH TECHNICAL DATA

Indoor unit		AW-HDH009-N91	AW-HDH012-N91	AW-HDH018-N91	AW-HDH024-N91
Outdoor unit		AW-YHDH009-H91	AW-YHDH012-H91	AW-YHDH018-H91	AW-YHDH024-H91
Phase		Single phase	Single phase	Single phase	Single phase
COOLING					
Rated power (min./max.)	kW	2.84 (1.02-3.19)	3.52 (0.82-4.16)	5.28 (1.73-6.21)	7.32 (2.58-8.43)
Pdesignc	kW	2.70	3.50	5.30	7.20
Rated power input	kW	0.71	1.09	1.7	2.21
SEER/Energy label		7.6/A++	7.1/A++	6.6/A++	6.6/A++
Operating limits	°C	-15°/50° Dry bulb			
HEATING					
Rated power (min./max.)	kW	2.77 (0.88-3.66)	3.74 (0.85-4.77)	5.58 (1.05-6.97)	7.54 (1.52-9.43)
Pdesignh (average climate)	kW	2.70	2.80	3.90	5.10
Pdesignh (warmer climate)	kW	3.10	3.20	4.40	6.30
Rated power input	kW	0.66	1.02	1.47	2.19
SCOP/Energy Label (average climate)		4.1/A+	4/A+	4/A+	4/A+
SCOP/Energy Label (warmer climate)		5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++
Operating limits	°C	-15°/30° Dry bulb			
Power @ -10 °C	kW	2.31	2.36	4.28	5.89
Power @ -15 °C	kW	2.15	2.19	3.76	5.36
INDOOR UNIT					
Sound pressure level to 1 m (VL/LS/MS/HS)	dB (A)	20/23/29/39	21/22/30/38	22/28/33/41	26/30/40/46
Sound power level	dB (A)	54	56	58	62
Airflow (LS/MS/HS)	m³/h	230/309/416	294/459/515	420/505/750	640/830/1020
Dehumidification	l/h	1	1.2	1.7	2.4
Outline dimensions (WxHxD)	mm	722x290x187	802x297x189	965x319x215	1080x335x226
Package dimensions (WxHxD)	mm	790x370x270	875x375x285	1045x405x305	1155x415x315
Net weight/Gross weight	kg	7.4/9.6	8.2/10.7	10.8/14.1	12.9/16.5
Part number		7SP023186	7SP023187	7SP023188	7SP023189
OUTDOOR UNIT					
Sound pressure level to 1 m	dB (A)	55	54	57	60
Sound power level	dB (A)	59	60	64	66
Airflow	m³/h	2000	2000	2100	2700
Compressor type		Rotary DCI	Rotary DCI	Rotary DCI	Rotary DCI
Outline dimensions (WxHxD)	mm	770x555x300	770x555x300	800x554x333	845x700x320
Package dimensions (WxHxD)	mm	900x585x345	900x585x345	920x615x390	965x765x395
Net weight/Gross weight	kg	27.2/29.7	27/29.4	37/39.9	50/53.1
Part number		7SP063035	7SP063036	7SP063037	7SP063038
POWER SUPPLY					
Phase/Voltage/Frequency		1P/220-240V/50Hz	1P/220-240V/50Hz	1P/220-240V/50Hz	1P/220-240V/50Hz
Power supply side		Outdoor	Outdoor	Outdoor	Outdoor
Power cable section	mm²	3x1.5	3x1.5	3x1.5	3x2.5
Fuse rating am (D curve)	A	10	10	16	25
Electrical connections	mm²	5x1.5	5x1.5	5x1.5	5x2.5
PIPE LINE					
Suction pipe diameter	inches	3/8"	3/8"	1/2"	5/8"
Liquid pipe diameter	inches	1/4"	1/4"	1/4"	3/8"
Max. length	m	25	25	30	50
Max. height	m	10	10	20	25
Refrigerant/GWP		R32/675	R32/675	R32/675	R32/675
Charge (5 m)	kg	0.7	0.8	1.25	1.6
Additional charge	g/m	12	12	12	24

COMBINATIONS

Indoor unit	Compatible with outdoor unit	
	Monosplit	Multisplit
High wall	YHDH	YDZC
HDH		